



Features

Housing: Plastic With Aluminum Inside

Thermal Conductivity: 226 W/m·K

Led: Bridgelux

CRI: Ra>80

SDCM: <6

Power Factor: >0.95

THD: <15

Driver: Osram

Driver Efficiency: >90%

Protection: OTP, OCP, OVP, SCP

Surge Protection: 2KV

Waterproof: IP65




Impact Test: IK08

Electrical: 220-240V, 50/60Hz

Operating Temperature: -20~40°C

TM21: L80B10>50,000H


Lifetime: 50,000H

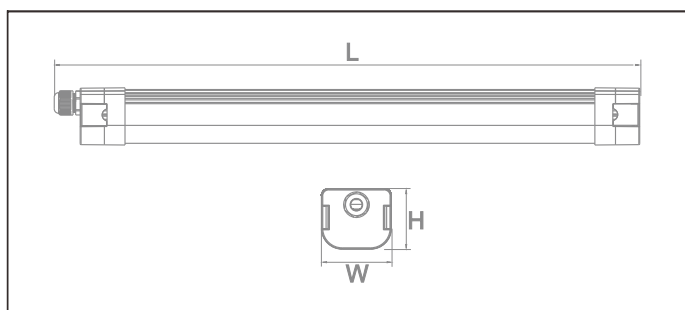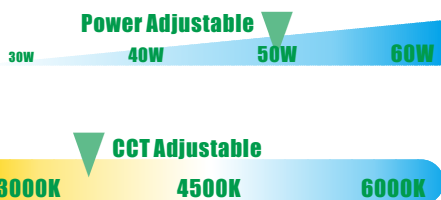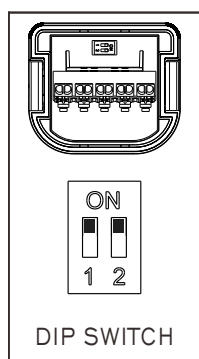

Functions


On-off • DALI

Optical options:



Watt	Voltage	Lumen	CRI	IP	Dimension
20W	220~240V	2800LM	>80	IP65	L659*W74*H64MM
40W	220~240V	5600LM	>80	IP65	L1221*W74*H64MM
60W	220~240V	8400LM	>80	IP65	L1502*W74*H64MM

Packing

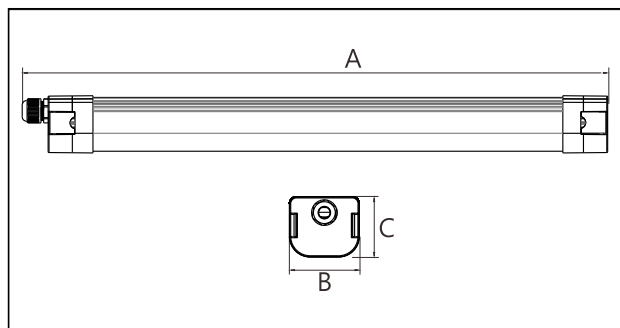

L*W*H (mm)	Inner Carton(mm)			QTY / INNER CTN	Outer Carton(mm)			QTY / Outer CTN	NW/CTN	GW/CTN
659*74*64	720	80	70	1	735	260	155	6	3.50	4.50
1221*74*64	1280	80	70	1	1295	260	155	6	9.00	10.50
1502*74*64	1560	80	70	1	1575	260	155	6	9.50	11.50