



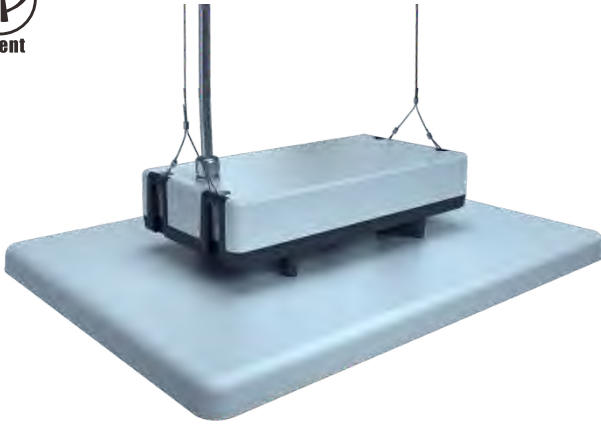

160LM/W

Features


Housing: Pure Aluminum
 Thermal Conductivity: 226 W/m·K
 Led: Philips
 CRI: Ra>8
 SDCM: <6
 Power Factor: >0.95
 THD: <15
 Driver: Sosen
 Driver Efficiency: >93%
 Protection: OTP, OCP, OVP, SCP
 Surge Protection: 4KV
 Waterproof: IP65
 Impact Test: IK10
 Electrical: 100-277V, 50/60Hz
 Operating Temperature: -40~50°C
 Tm21: L90B10>50,000H
 Lifetime: 50,000H

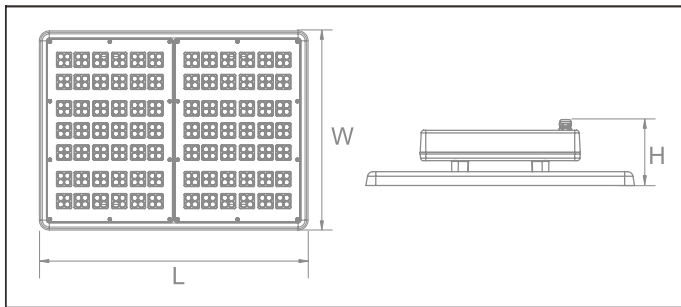

Functions

ZigBee · PWM · DALI · 0/1~10V · Micro-wave


Optical options:



Watt	Voltage	Lumen	CRI	IP	Dimension
100W	100~277V	16000LM	>80	IP65	L362*W257*H120MM
120W	100~277V	19200LM	>80	IP65	L415*W310*H120MM
150W	100~277V	24000LM	>80	IP65	L487*W362*H120MM
200W	100~277V	32000LM	>80	IP65	L487*W362*H120MM



Packing

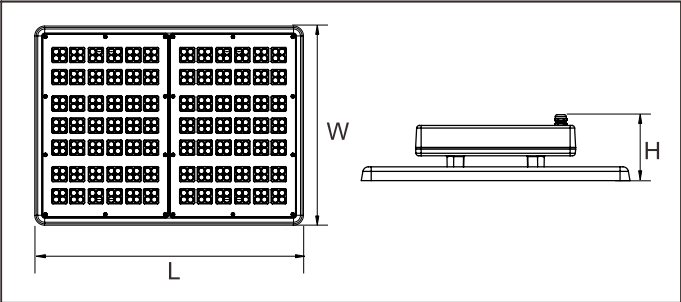

Model	L*W*H (mm)	Outer Carton(mm)			QTY/CTN	NW/CTN	GW/CTN
100W	362*257*120	460	330	175	1	4.1	4.5
120W	415*310*120	500	385	175	1	4.4	5.0
150W	487*362*120	560	430	175	1	5.8	6.5
200W	487*362*120	560	430	175	1	5.8	6.5