

Features

Housing: Die-cast Aluminum ADC12

Thermal Conductivity: 96 W/m·K

Led: Philips

CRI: Ra>70 (80/90 for option)

SDCM: <6

Power Factor: >0.95

THD: <15

Driver: Sosen

Driver Efficiency: >90%

Protection: OTP, OCP, OVP, SCP

Surge Protection: 4KV

Waterproof: IP66


Impact Test: IK08

Electrical: 100-277V, 50/60Hz

Operating Temperature: -40~50°C

TM21: L80B10>50,000H



Lifetime: 50,000H

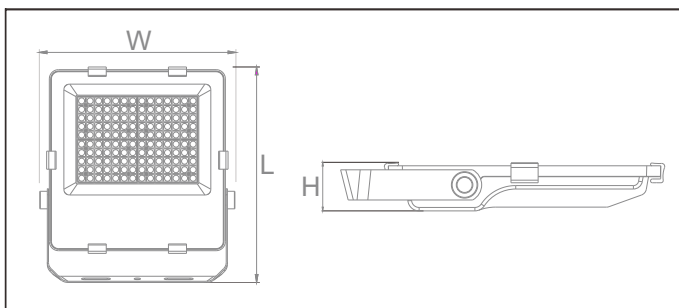

Functions

DALI · 0/1~10V · Micro-wave · PIR

Optical options:



150lm/w


5 YEARS WARRANTY

Sosen Driver

Philips LED

Watt	Voltage	Lumen	CRI	IP	Dimension
100W	100~277V	15000LM	>70 (80)	IP66	L354*W319*H53MM
150W	100~277V	22500LM	>70 (80)	IP66	L400*W359*H63MM
200W	100~277V	30000LM	>70 (80)	IP66	L430*W389*H63MM

Packing

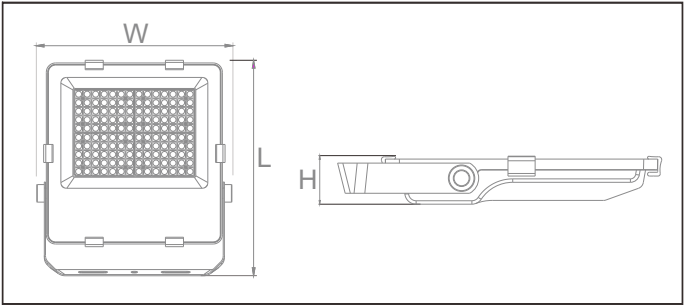

Watt	Outer Carton(mm)			QTY / CTN	NW/CTN	GW/CTN
100W	425	365	138	1	2.90	3.80
150W	470	405	148	1	3.80	4.90
200W	500	435	148	1	4.50	5.80