




Features


Housing: Pure Aluminum A6063
 Thermal Conductivity: 226 W/m·K
 Led: Bridgelux
 CRI: Ra>80
 SDCM: <6
 Power Factor: >0.95
 THD: <15
 Driver: Explosion Proof Driver
 Driver Efficiency: >92%
 Protection: OTP, OCP, OVP, SCP
 Surge Protection: 4KV
 Waterproof: IP65
 Impact Test: IK10
 Corrosion Proof: WF2
 Electrical: 100-277V, 50/60Hz
 Operating Temperature: -25~45 °C
 TM21: L90B10>50,000H
 Lifetime: 50,000H

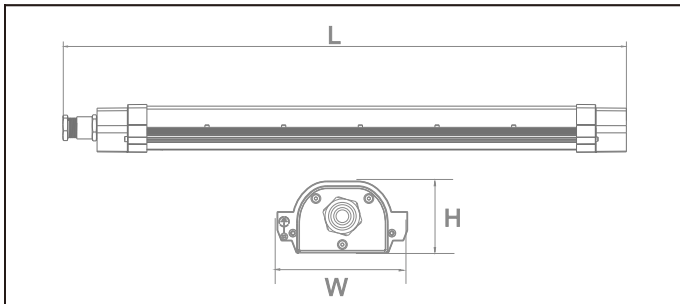

Functions

ZigBee · PWM · DALI · 0/1~10V

Optical options:



140lm/w


5 YEARS WARRANTY

Explosion Proof Driver

Bridgelux LED

Watt	Voltage	Lumen	CRI	IP	Dimension
20W	100~277V	2800LM	>80	IP65	L735*W115*H63MM
40W	100~277V	5600LM	>80	IP65	L735*W115*H63MM
40W	100~277V	5600LM	>80	IP65	L1335*W115*H63MM
60W	100~277V	8400LM	>80	IP65	L1335*W115*H63MM
80W	100~277V	11200LM	>80	IP65	L1335*W115*H63MM

Packing

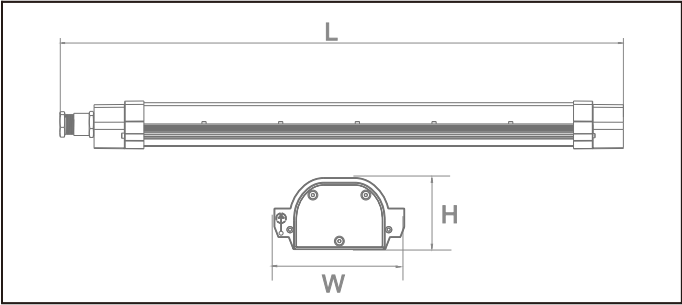

Model	L*W*H (mm)	Inner Carton(mm)			QTY / INNER CTN	Outer Carton(mm)			QTY / Outer CTN	NW/CTN	GW/CTN
TB20W	735*115*63	/	/	/	/	900	160	115	1	2.60	3.30
TB40W	735*115*63	/	/	/	/	900	160	115	1	2.60	3.30
TB40W	1335*115*63	/	/	/	/	1500	160	115	1	4.00	4.70
TB60W	1335*115*63	/	/	/	/	1500	160	115	1	4.00	4.70
TB80W	1335*115*63	/	/	/	/	1500	160	115	1	4.10	4.80