



## BRIEF INFORMATION

### LEDayLine 15 and LEDayLine 30 daytime running lights

- Daytime running lights sets for horizontal flush-mounting
- Exceptionally compact design – suitable for curved bumpers\*
- "Fit and forget" solution thanks to maintenance-free LEDs



### PRODUCT BENEFITS

The LEDayLine 15 and 30 daytime running lights are set apart by their shallow depth, simple mounting and low energy consumption. Once the mounting frame has been secured to the vehicle front, the daytime running light simply "snaps" into the mounting frame fixture.

The new LEDayLine daytime running lights improve the recognisability of your vehicle and therefore your safety. Other road users can better estimate the distance to your vehicle and react faster. The difference between moving, stationary and turning vehicles is clearly visible, which also significantly reduces the risk of accidents at junctions.

\* 2 versions for installation in different vehicle fronts.

LEDayLine 15: suitable for vehicles with a 15° angle at the installation location.

LEDayLine 30: suitable for vehicles with a 30° angle at the installation location.

## TECHNICAL DATA


- For horizontal flush-mounting
- 8 LEDs per daytime running light
- 2 versions for horizontal flush-mounting in different vehicle fronts:
  - LEDayLine 15:** suitable for vehicles with a 15° angle at the installation location.
  - LEDayLine 30:** suitable for vehicles with a 30° angle at the installation location.
- 12 V and 24 V versions available
- Power output: 2 W
- ECE and SAE type-approved

## SCOPE OF SUPPLY




- 2 LED-daytime running lights (with 8 LEDs each)
- Includes mounting frame
- 1 change-over relay
- Pre-assembled harness
- Mounting instructions

## DIMENSIONS AND MOUNTING ANGLE

LEDayLine 15

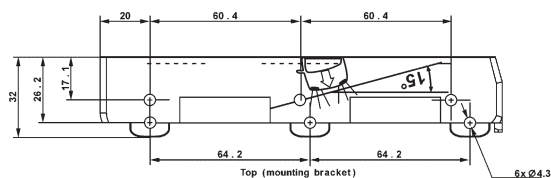

LEDayLine 30

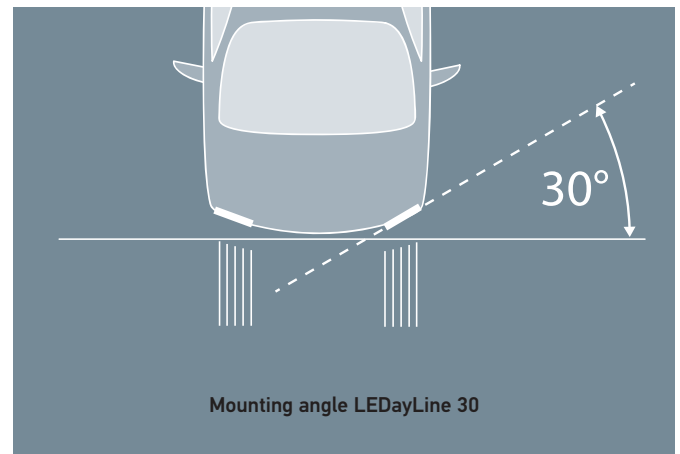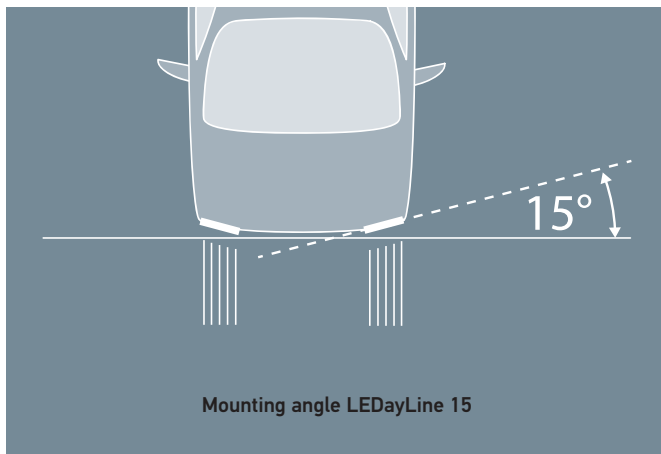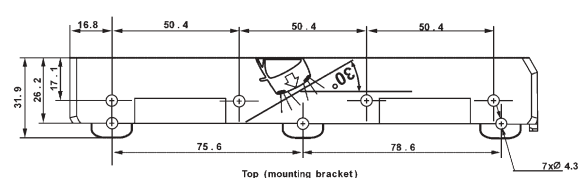

# RANGE OVERVIEW





12 V, daytime running light set	2PT 980 860-801
24 V, daytime running light set	2PT 980 860-851
Suitable for vehicles with a 15° angle at the installation location.	



12 V, daytime running light set	2PT 980 850-801
24 V, daytime running light set	2PT 980 850-851
Suitable for vehicles with a 30° angle at the installation location.	

# ATTACHMENT REGULATIONS

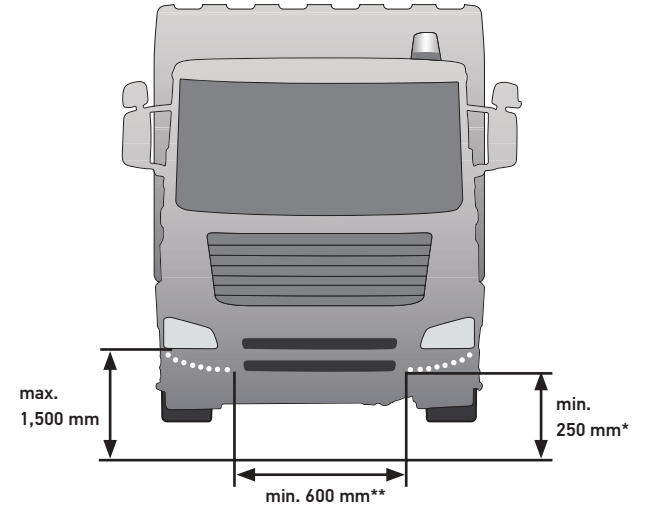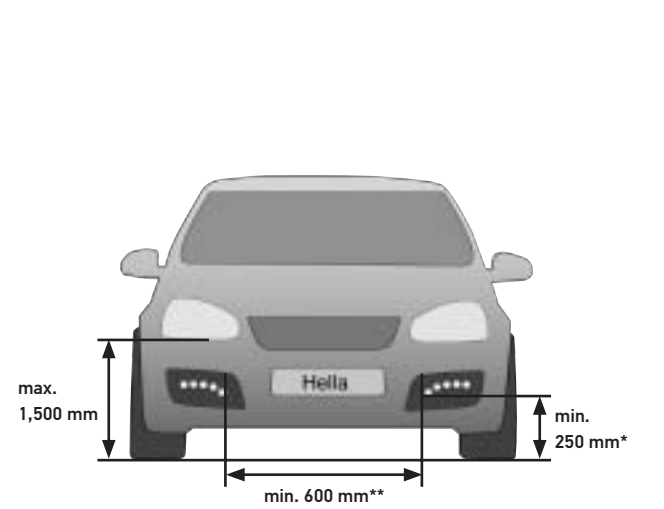

Legislation allows different attachment variations. However, the distances and beam angles to be adhered to are specified.

- \* When used as a position light, the minimum attachment height must be 350 mm and the maximum distance from the outside edge must be 400 mm.
- \*\* For vehicles with a width of <1,300 mm, the spacing distance has to be at least 400 mm.
- When a daytime running light is used as a position light, the standard position light must be permanently disabled in accordance with ECE-R 48.
- For more information on legal stipulations and attachment regulations consult the internet or a qualified garage.
- See the relevant assembly instructions for more detailed information.

min. = minimum distance  
max. = maximum distance

**HELLA KGaA Hueck & Co.**

Rixbecker Straße 75

59552 Lippstadt, Germany

Tel.: +49 2941 38-0

Fax: +49 2941 38-7133

Internet: [www.hella.com](http://www.hella.com)

© HELLA KGaA Hueck & Co., Lippstadt

922 999 132-423 XX/03.12/1.0

Printed in Germany



**More information:**

[www.tagfahrlicht.de](http://www.tagfahrlicht.de)

[www.daytime-running-light.com](http://www.daytime-running-light.com)